



## **QUIK GLUE**

**CD4150 White** – 50cc – 30 second set time

**CD4220 White** – 220cc – 30 second set time

**CD4350 Tan** – 50cc – 60 second set time

**CD4320 Tan** – 220cc – 60 second set time

**CD4250 Black** – 50cc – 90 second set time

**CD4220S Black** – 220cc – 90 second set time

**CD401** | 6 – Pack Mix Tips for 50 cc Cartridge

**CD402** | 20 - Pack Extra Mix Tips for 50 cc Cartridge

**CD412** | 12 - Pack Extra Mix Tips for 220 cc Cartridge

**CDDMA51** | 50cc Dispenser is required for use (sold separately)

**CDDM220** | 220cc Dispenser is required for use (sold separately)

Made in USA



QUIKGLUE.revA.09292021

Manufactured by Coyote®

419 N. Curtis Rd., Boise, ID 83706

(208) 429-0026 | [www.coyote.us](http://www.coyote.us)



## Parts Included

Coyote Quik Glue 50cc or 220cc (1)


Small Mix Tip or Large Mix Tip (1)



Coyote Quik Glue 50cc



Small Mix Tip

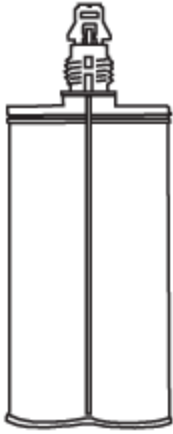

Coyote Quik Glue 220cc



Large Mix Tip

**For instructional translations go to:**

Para traducciones instructivas, vaya a:

Gebrauchsanweisungen finden Sie unter:

Pour les traductions pédagogiques, rendez-vous sur:

Per le traduzioni didattiche vai a:


For instruksjonoversettelser, gå til:

For instruksjonoversættelser, gå til:


Po tłumaczenia instruktażowe przejdź do:

[www.coyote.us/instructions-quikglue](http://www.coyote.us/instructions-quikglue)


## Instructions for 50cc Quik Glue

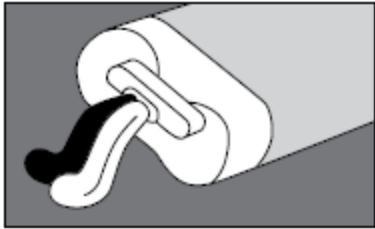


1. Purge the cartridge Snip off the tip. Insert cartridge into dispenser gun. Expel a small amount of adhesive to purge the cartridge.

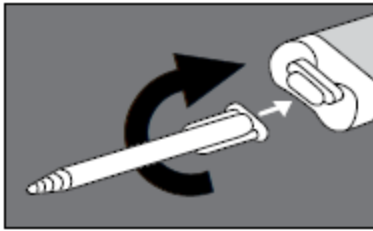

2. Install mix tip Line up mix tip appropriately and twist into place. Tips can only be used once.

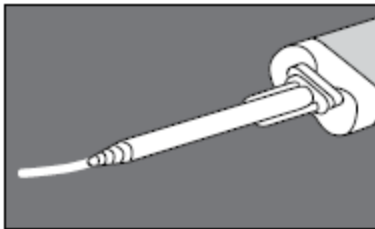

3. Run a test bead approx. 1" in length. Store unused portion by leaving the mix tip on when done.

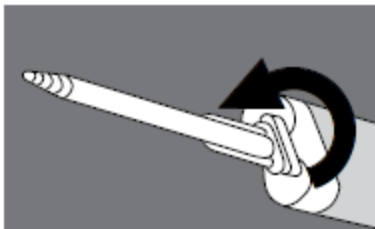

4. Leave used tip attached as a cap until next use to keep glue from drying out in the tubes.


When your ready to use the glue again remove old tip and replace with a new tip.

### Attention

1. Read carefully BEFORE applying adhesive to ensure proper adhesion.
2. Quik Glue sets fast. To ensure a proper bond, work quickly. Refrigerate the cartridge to slow down work time.

## Parts Sold Separately

**CDDMA51** | Dispenser is required for use (sold separately)

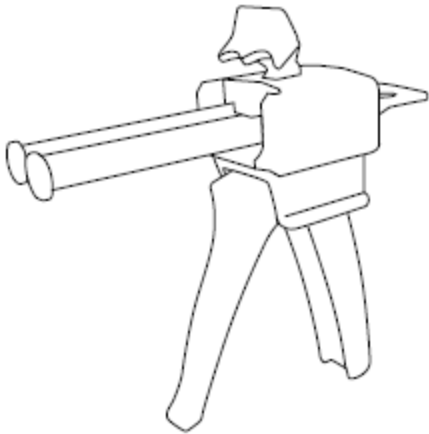


**CD401** | 6 - Pack Extra Mix Tips for 50 cc Cartridge.

**CD402** | 20 - Pack Extra Mix Tips for 50 cc Cartridge.




---


## Instructions for 220cc Quik Glue

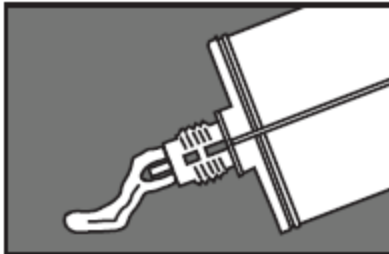


1. Purge the cartridge. Snap off the tip with a screwdriver. Insert the cartridge into the dispenser gun. Expel a small amount of adhesive to purge the cartridge.

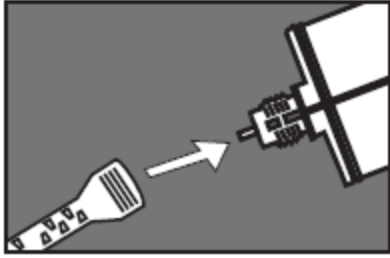

2. Install mix tip Line up mix tip appropriately and screw into place. Tips can only be used once.

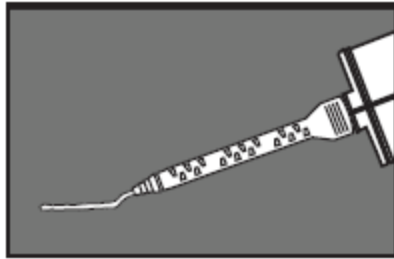

3. Run a test bead approx. 1" in length. Store unused portion by leaving the mix tip on when done.

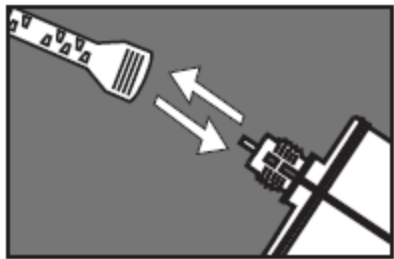


4. Leave used tip attached as a cap until next use to keep glue from drying out in the tubes. When your ready to use the glue again remove the old tip and replace it with a new tip.

#### **Attention:**

1. Read carefully BEFORE applying adhesive to ensure proper adhesion.
2. Quik Glue sets fast. To ensure a proper bond, work quickly. Refrigerate the cartridge to slow down work time.


### **Parts Sold Separately for the 220cc**

**CDDM220** | Dispenser is required for use (sold separately)

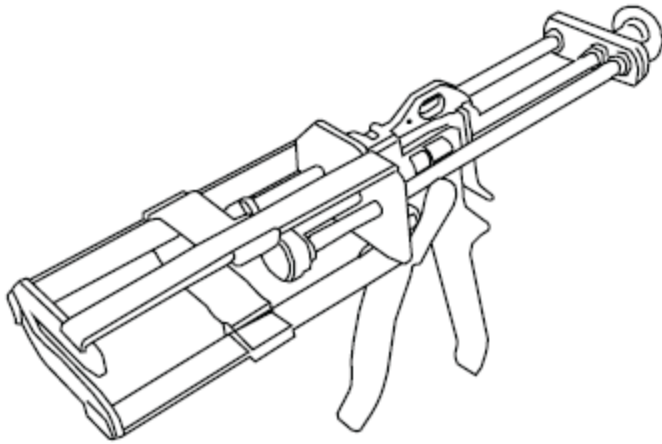

---

**CD412** | 12-Pack Extra Mix Tips for 220 cc Cartridge.

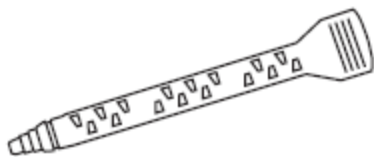

---

## MAINTENANCE



### **Maintenance**

To ensure maximum performance, the fulcrum pins in the handle should be lubricated with WD-40 (or equivalent) after every 10 uses.

Always wipe off any adhesive using manufactures recommended solvent before it has time to cure.

## **ATTENTION**

Never operate the applicator with missing or loose parts.

Remove any unwanted material residue from applicator using a soft cloth and a solvent recommended by the material supplier.

Always wear safety glasses while operating this product and follow the material suppliers usage instructions.

## **DISCLAIMER**

While Coyote® has taken every care in the preparation of this document, it cannot accept responsibility for omissions, and does not warrant that it is correct and comprehensive in every particulate detail. Equipment supplied should always be operated by persons with an appropriate level of skill and training. Coyote® shall not be liable for incidental or consequential damages resulting from the misuse/abuse of any of its products. Manufactured in the UK to ISO 9001:2008 standards.

Every effort has been made to ensure that the information contained in this manual was correct at the time of going to press. However, the company retains the right to change any specification without notice, in line with the company's policy of continual product development.

Contact Coyote for a MSDS for this product [coyote@coyoteprosthethics.com](mailto:coyote@coyoteprosthethics.com)